

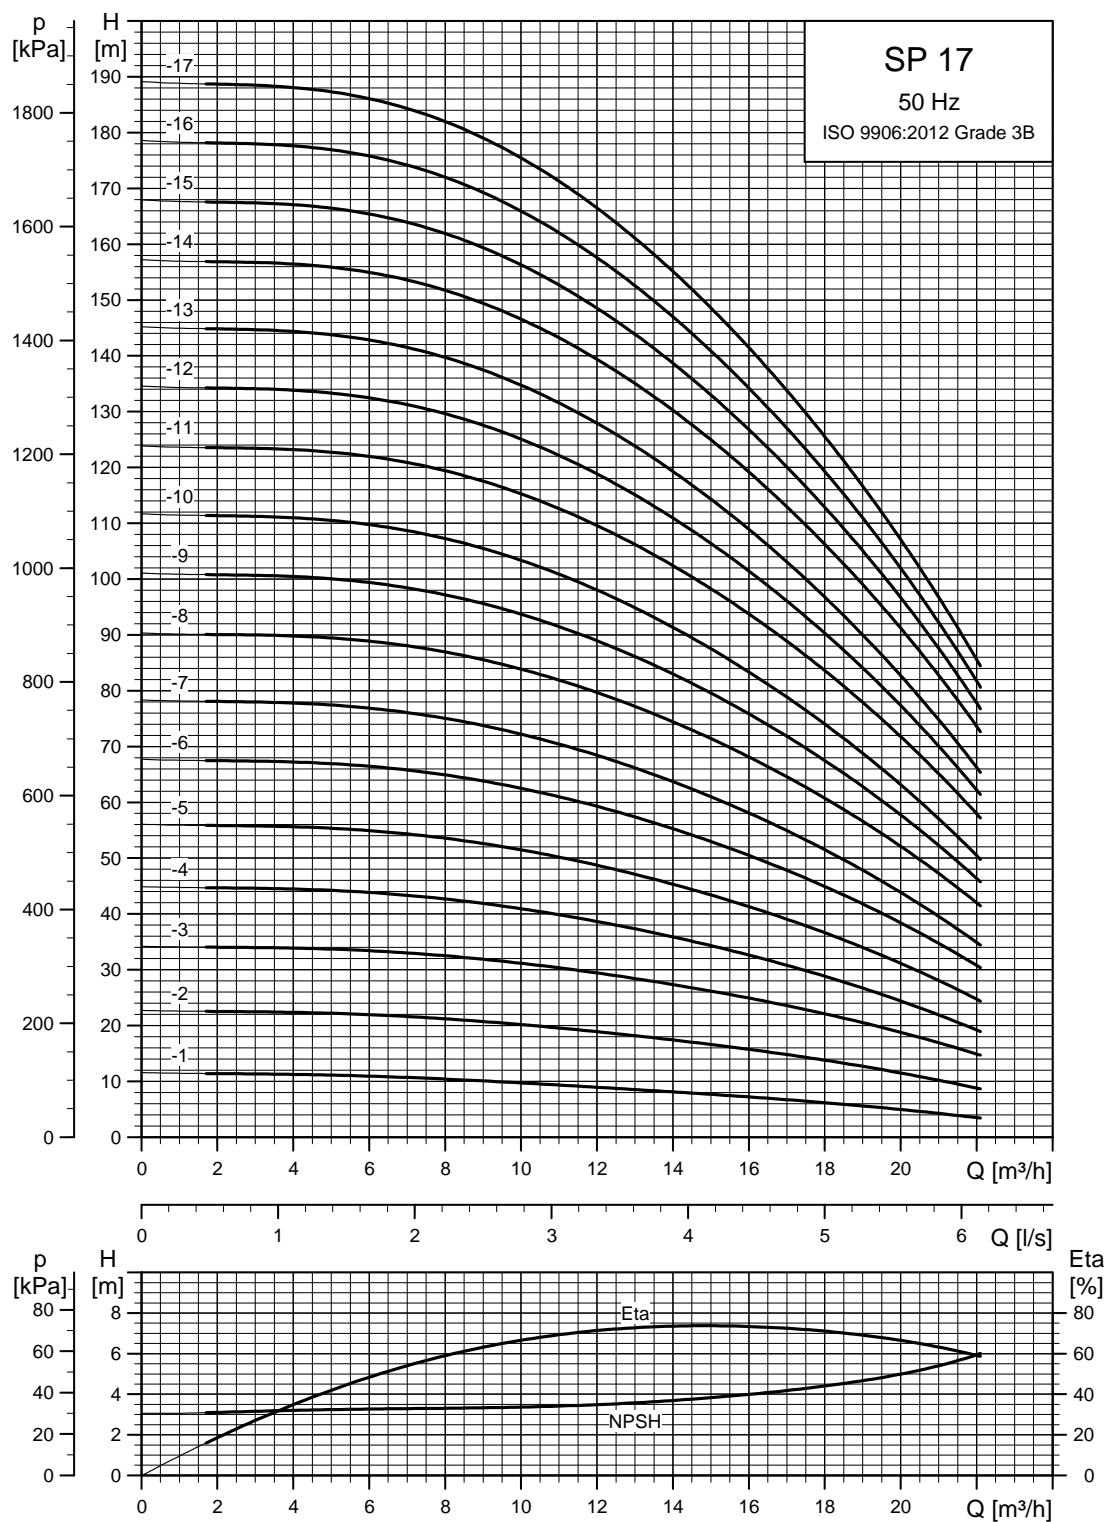


SP 17

Performance curves

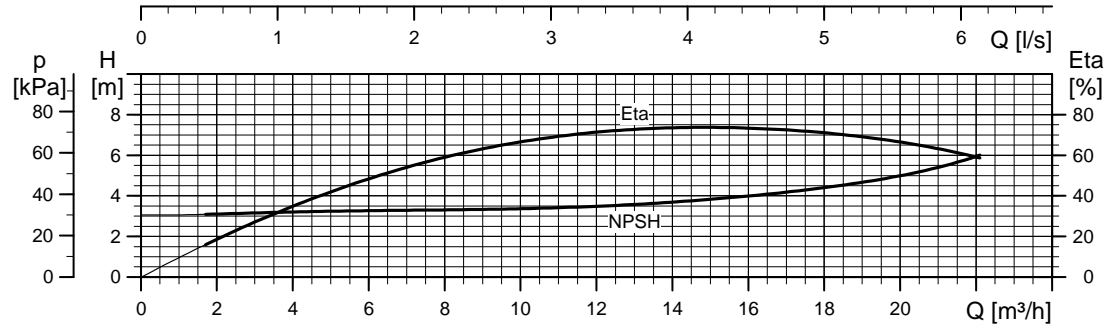


TM01 8757 4702

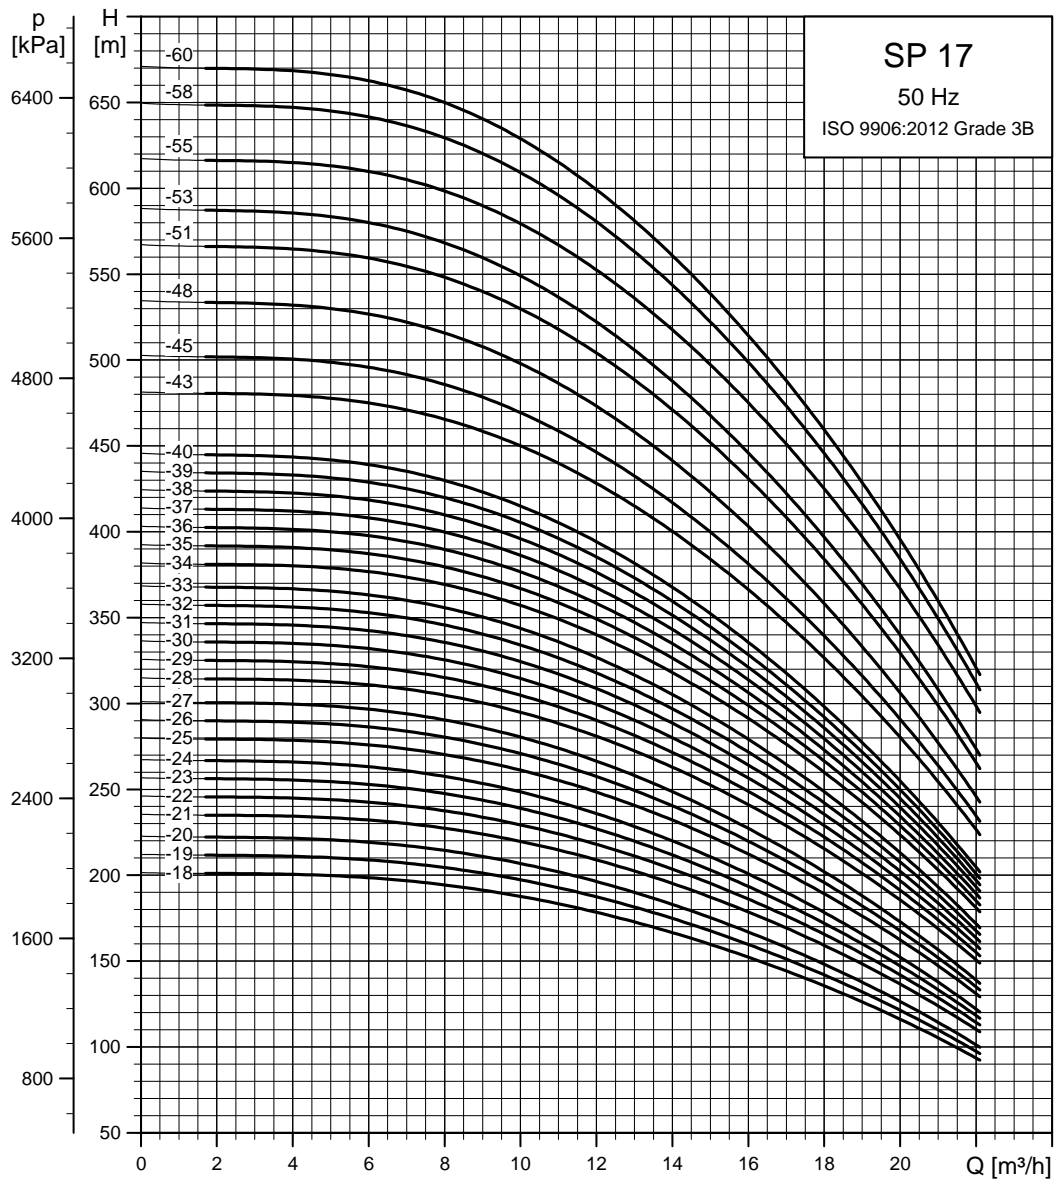

TM01 8758 4702

Dimensions and weights

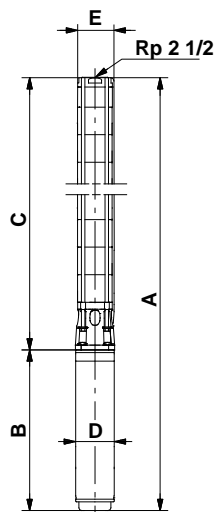

TM01 2435 1798

SP 17-43 to SP 17-60 are mounted in sleeve for R 3 connection.

The pump types listed are also available in N- and R-versions. See page 6.

Pumps mounted in sleeve are only available in standard and N-versions.


Other types of connection are possible by means of connecting pieces. See page 108.

* Maximum diameter of pump with one motor cable.


** Maximum diameter of pump with two motor cables.

Pump type	Motor		Dimensions [mm]					Net weight [kg]	
	Type	Power [kW]	C	B	A	D	E*		E**
Single-phase, 1 x 230 V									
SP 17-1	MS 402	0.55	324	317	641	95	134	12	
SP 17-1	MS 4000	2.2	324	577	901	95	134	26	
SP 17-2	MS 402	1.1	384	387	771	95	134	17	
SP 17-2	MS 4000	2.2	384	577	961	95	134	27	
SP 17-3	MS 4000	2.2	444	577	1021	95	134	28	
SP 17-4	MS 4000	2.2	504	577	1081	95	134	30	
Three-phase, 3 x 230 V / 3 x 400 V									
SP 17-1	MS 402	0.55	324	282	606	95	134	11	
SP 17-1	MS 4000	0.75	324	402	726	95	134	18	
SP 17-2	MS 402	1.1	384	347	731	95	134	15	
SP 17-2	MS 4000	1.1	384	417	801	95	134	20	
SP 17-3	MS 402	2.2	444	387	831	95	134	19	
SP 17-3	MS 4000	2.2	444	457	901	95	134	23	
SP 17-4	MS 402	2.2	504	387	891	95	134	21	
SP 17-4	MS 4000	2.2	504	457	961	95	134	25	
SP 17-5	MS 4000	3.0	564	497	1061	95	134	27	
SP 17-6	MS 4000	4.0	624	577	1201	95	134	32	
SP 17-7	MS 4000	4.0	684	577	1261	95	134	34	
SP 17-8	MS 4000	5.5	744	677	1421	95	134	40	
SP 17-9	MS 4000	5.5	804	677	1481	95	134	42	
SP 17-10	MS 4000	5.5	864	677	1541	95	134	43	
SP 17-11	MS 4000	7.5	924	777	1701	95	134	50	
SP 17-12	MS 4000	7.5	984	777	1761	95	134	51	
SP 17-13	MS 4000	7.5	1044	777	1821	95	134	53	
SP 17-8	MS 6000	5.5	763	544	1307	139.5	142	144	49
SP 17-9	MS 6000	5.5	823	544	1367	139.5	142	144	50
SP 17-10	MS 6000	5.5	883	544	1427	139.5	142	144	52
SP 17-11	MS 6000	7.5	943	574	1517	139.5	142	144	56
SP 17-12	MS 6000	7.5	1003	574	1577	139.5	142	144	58
SP 17-13	MS 6000	7.5	1063	574	1637	139.5	142	144	59
SP 17-14	MS 6000	9.2	1123	604	1727	139.5	142	144	66
SP 17-15	MS 6000	9.2	1183	604	1787	139.5	142	144	67
SP 17-16	MS 6000	9.2	1243	604	1847	139.5	142	144	69
SP 17-17	MS 6000	9.2	1303	604	1907	139.5	142	144	70
SP 17-18	MS 6000	11	1363	634	1997	139.5	142	144	75
SP 17-19	MS 6000	11	1423	634	2057	139.5	142	144	76
SP 17-20	MS 6000	11	1483	634	2117	139.5	142	144	77
SP 17-21	MS 6000	13	1543	664	2207	139.5	142	144	82
SP 17-22	MS 6000	13	1603	664	2267	139.5	142	144	83
SP 17-23	MS 6000	13	1663	664	2327	139.5	142	144	84
SP 17-24	MS 6000	13	1723	664	2387	139.5	142	144	86
SP 17-25	MS 6000	15	1783	699	2482	139.5	142	144	91
SP 17-26	MS 6000	15	1843	699	2542	139.5	142	144	92
SP 17-27	MS 6000	15	1903	699	2602	139.5	142	144	94
SP 17-28	MS 6000	18.5	1963	754	2717	139.5	142	144	101
SP 17-29	MS 6000	18.5	2023	754	2777	139.5	142	144	102
SP 17-30	MS 6000	18.5	2083	754	2837	139.5	142	144	103
SP 17-31	MS 6000	18.5	2143	754	2897	139.5	142	144	105
SP 17-32	MS 6000	18.5	2203	754	2957	139.5	142	144	106
SP 17-33	MS 6000	18.5	2263	754	3017	139.5	142	144	108
SP 17-34	MS 6000	22	2323	814	3137	139.5	142	144	115
SP 17-35	MS 6000	22	2383	814	3197	139.5	142	144	116
SP 17-36	MS 6000	22	2443	814	3257	139.5	142	144	118
SP 17-37	MS 6000	22	2503	814	3317	139.5	142	144	119
SP 17-38	MS 6000	22	2563	814	3377	139.5	142	144	120
SP 17-39	MS 6000	22	2623	814	3437	139.5	142	144	122
SP 17-40	MS 6000	22	2683	814	3497	139.5	142	144	123
SP 17-43	MS 6000	26	3215	874	4089	139.5	175	181	164
SP 17-45	MS 6000	26	3335	874	4209	139.5	175	181	167
SP 17-48	MS 6000	26	3515	874	4389	139.5	175	181	173
SP 17-51	MS 6000	30	3695	944	4639	139.5	175	181	186
SP 17-53	MS 6000	30	3815	944	4759	139.5	175	181	189
SP 17-55	MMS 6	37	3935	1312	5247	144	175	181	234
SP 17-58	MMS 6	37	4115	1312	5427	144	175	181	240
SP 17-60	MMS 6	37	4235	1312	5547	144	175	181	243

Power curves

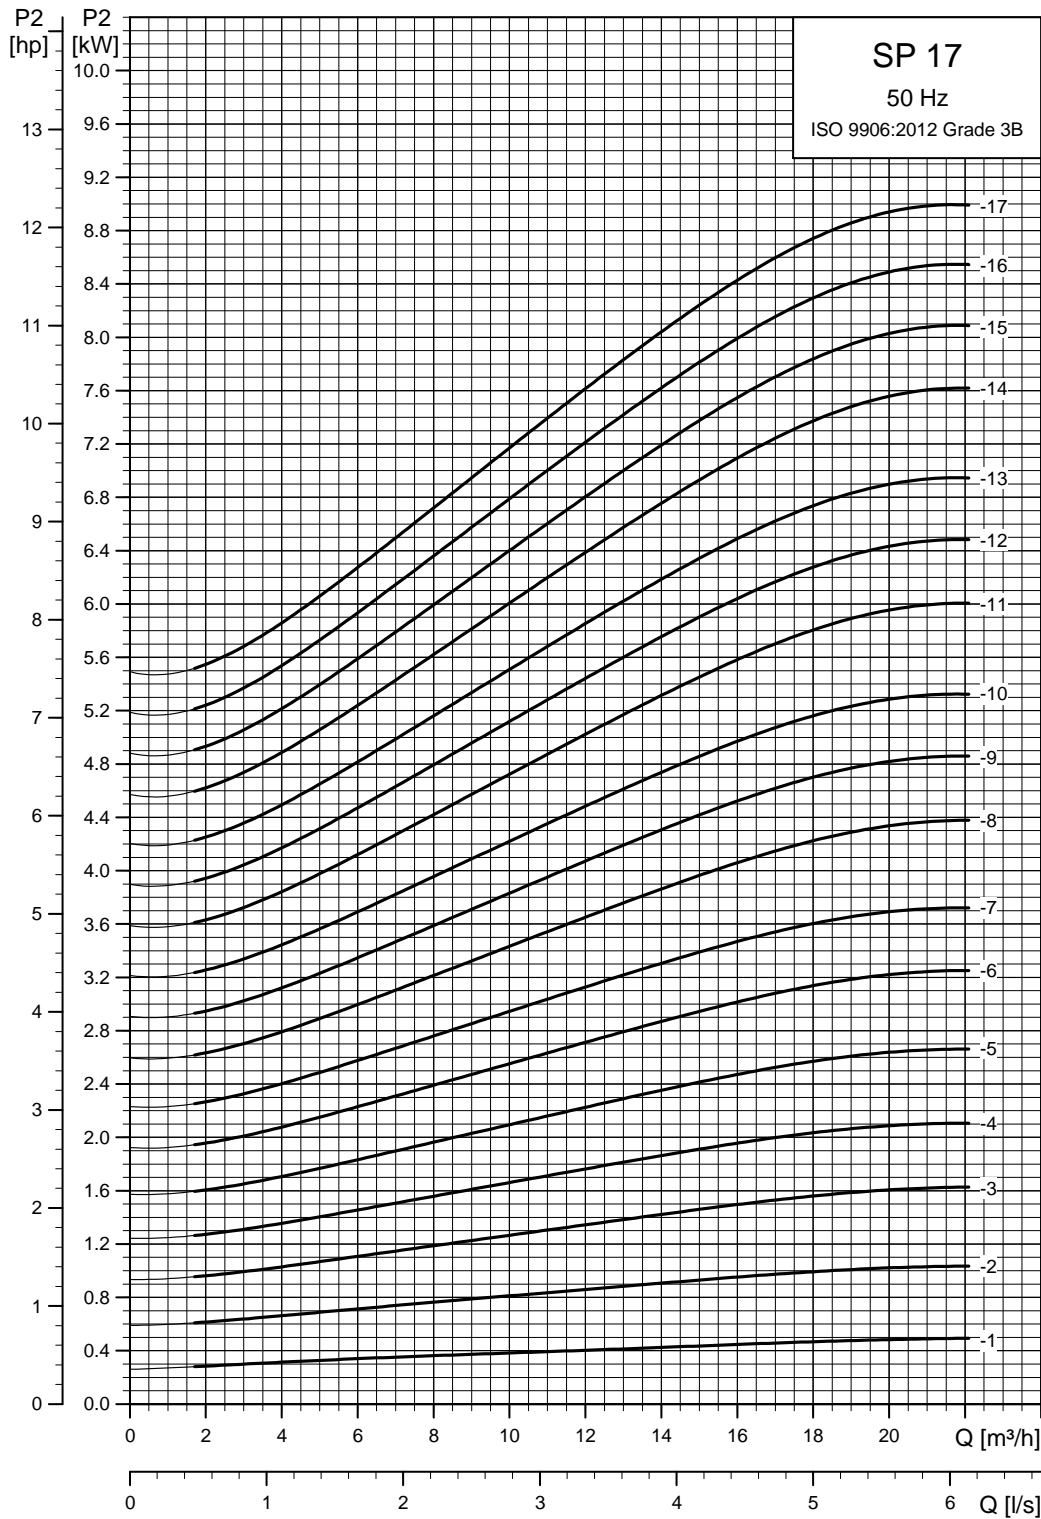

TM01 8759 4702

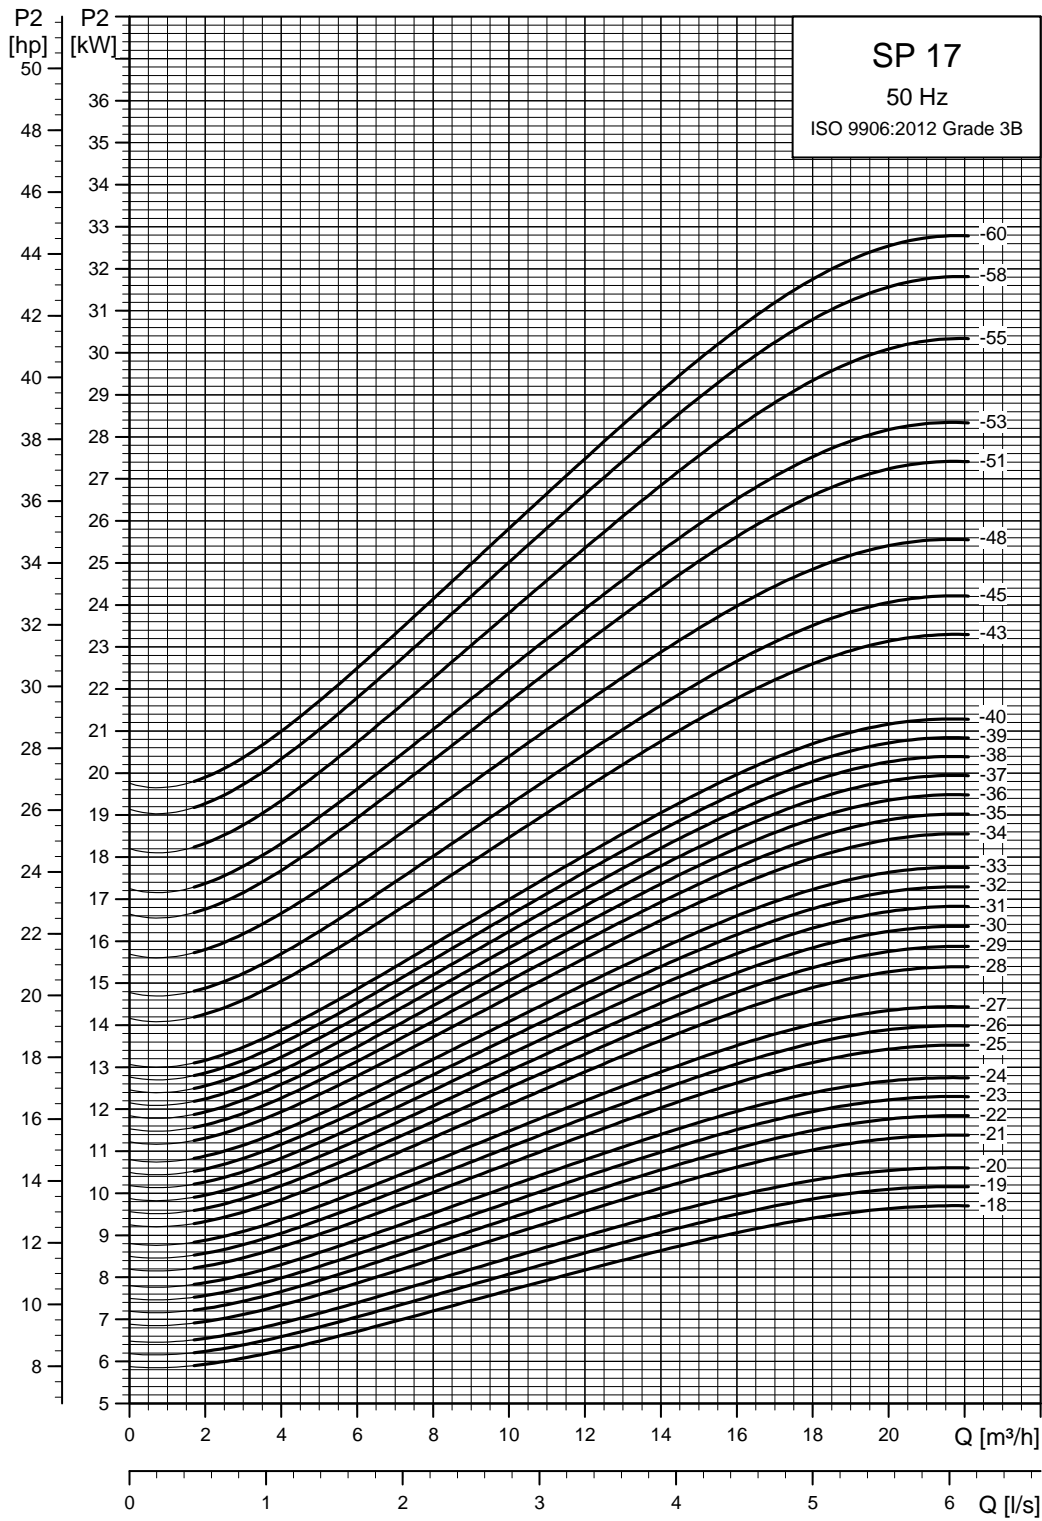

TM01 8760 4702